EASTERN UNITED STATES 1:250,000

ROME

EDITION 4

NI 16-6
SERIES V501

STOCK NO. V501XNI166***04

V501, EDITION 4

Prepared by the U.S. Army Topographic Command (HYLD), Washington, D.C. Compiled in 1959 by photogrammetric methods and from United States quadrangles, 1:24,000, 1:25,000, and 1:50,000 1936-56. Planimetry revised from aerial photographs taken 1954-58. Photographs field annotated 1958. Revised in 1972 by the U.S. Geological Survey from aerial photographs taken 1972.

Area covered by dashed light-blue pattern is subject to controlled inundation.

Area covered by light-blue hatching is to be submerged

Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram

LEGEND

Figures in red denote approximate distances in miles between stars

POPULATED PLACES
Over 500,000 — BOSTON
100,000 to 500,000 — RICHMOND
25,000 to 100,000 — EVANSTON
5,000 to 25,000 — Hialeah
1,000 to 5,000 — Bar Harbor
Less than 1,000 — Fishkill

RAILROADS — Single track, Double or Multiple
Standard gauge
Narrow gauge

BOUNDARIES
International
State
County
Park or reservation

Landplane airport
Landing area
Seaplane airport
Seaplane anchorage
Woods-brushwood

ROADS
Primary, all-weather, hard surface
Secondary, all-weather, hard surface
Light-duty, all-weather, hard or improved surface
Fair or dry weather, unimproved surface
Trail
Interchange
Route markers: Interstate, U.S., State — 95 29 193

Mine
Landmark: School; Church; Other
Spot elevation in feet — .221
Marsh or swamp
Intermittent or dry stream
Power line

Scale 1:250,000

20 Statute Miles — 30 Kilometers — 15 Nautical Miles

CONTOUR INTERVAL 100 FEET

TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 16

1970 MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 1¼° (30 MILS) EASTERLY FOR THE CENTER OF THE WEST EDGE TO ½° (10 MILS) WESTERLY FOR THE CENTER OF THE EAST EDGE

FOR SALE BY U.S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092

LOCATION DIAGRAM

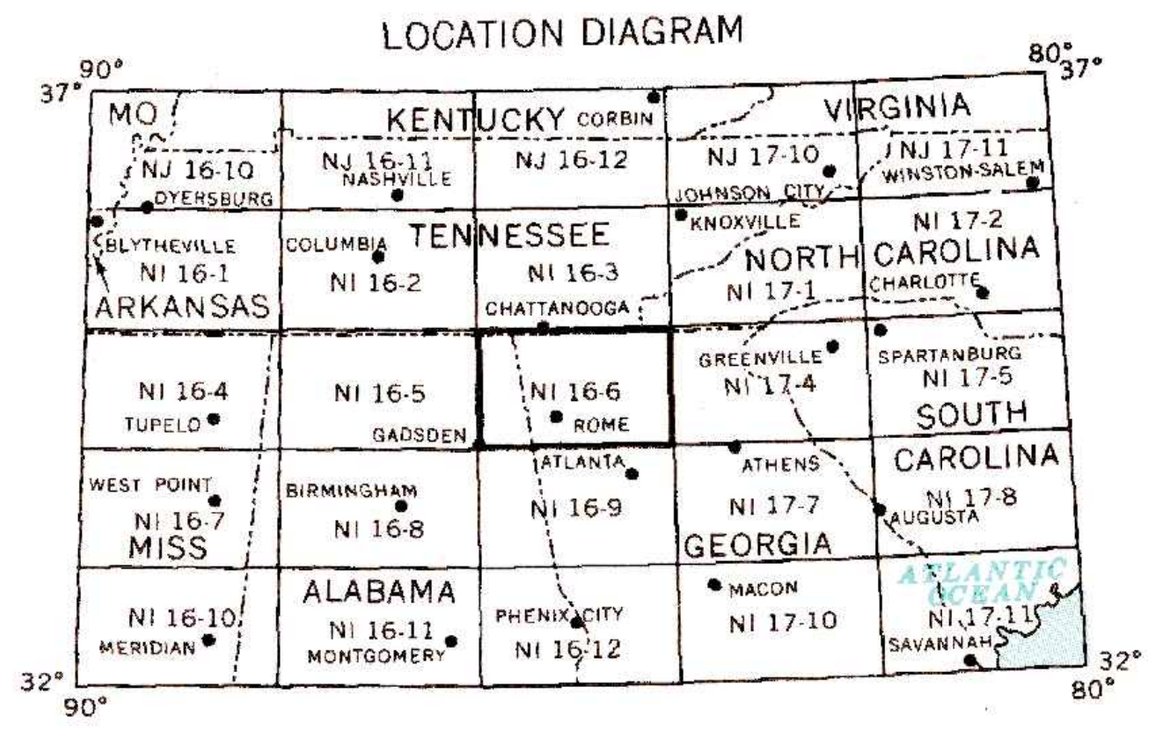

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

TOWNSHIP OR RANGE LINE
LAND GRANT BOUNDARY

INTERIOR—GEOLOGICAL SURVEY, RESTON, VIRGINIA—1974

GRID ZONE DESIGNATION: 16S

100,000 M. SQUARE IDENTIFICATION

EP	FP	GP
EN	FN	GN

IGNORE the SMALLER figures of any grid number; these are for finding the full coordinates. Use ONLY the LARGER figure of the grid number; example: 3770000

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS

SAMPLE POINT: SPRING PLACE

1. Read letters identifying 100,000 meter square in which the point lies. — FP
2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself: — 9
Estimate tenths from grid line to point: — 9
3. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself: — 4
Estimate tenths from grid line to point: — 8

SAMPLE REFERENCE: FP9948

If reporting beyond 18° in any direction, prefix Grid Zone Designation, as: 16SFP9948

ROME, GA.; ALA.; TENN.; N.C.
1958
REVISED 1972